

INDOFIL KM-355

Superior Acrylic Impact Modifier for Opaque Applications

1 INTRODUCTION

INDOFIL KM-355 is superior impact modifier with an all acrylic base. It is designed for use in rigid PVC opaque applications which require higher toughness in low dosages with good durability. It has extremely good weather resistance for outdoor applications.

You get the following advantages over conventional impact modifiers viz. :

- Enhanced weatherability
- Easy & economical processibility
- Higher impact strength even at low temperatures
- Low creep during use
- Good Mechanical strength
- Faster fusion promotion
- Correct dimensions due to low shrinkage

2. PHYSICAL CHARACTERISTICS

TYPICAL PHYSICAL PROPERTIES (These do not constitute specifications)	
Appearance	White, fine free-flowing powder with uniform particle size
Bulk Density, g/cc	0.40 to 0.45
Specific Gravity, @ 25 °C	1.10
Volatiles (%)	Max 1
Sieve Test Retention time	
60 mesh	Max 2
100 mesh	Max 20
200 mesh	Max 70
Partical Size Distribution	See Graph A

3 PERFORMANCE CHARACTRISTICS

3.1 Rheological Charactristics :

Please refer Graph B on next page.

Conditions : Machine used = Haake Rheocord 90

Rotor speed = 60 rpm

Charge weight = 65 gms.

Bowl Temp. = 180°C

Properties	Control	6phR of INDOFIL KM - 355
Fusion time (sec)	60.00	28.00
Fusion Temp. (°C)	171.00	169.00
Gelation time (minutes)	5.50	4.00
Gelation Temp. (°C)	206.00	206.00
Equillibrium Torque (Nm)	25.82	25.06
Thermal Stability (minutes)	10.08	12.20

Recipe used :

PVC Resin (K 67)	100 phR
Tin Stabiliser	2.25 phR
GMS	0.60 phR
OP Wax	0.40 phR
INDOFIL K-120ND	2.00 phR
INDOFIL KM 355	6.00 phR

Graph A



MALVERN PARTICLE SIZE DISTRIBUTION GRAPH

Result Analysis Report

Product Name : INDOFIL KM-355

Particle RI : 0.000

Dispersant Name : Water

Accessory Name : Hydro 2000MU (A)

Absorption : 0

Dispersant RI : 1.330

Analysis model : Single narrow mode

Size range : 0.020 to 2000.000 µm

Weighted Residual : 1.825 %

Sensitivity : Enhanced

Obscuration : 9.09 %

Result Emulation : Off

Concentration : 0.1010 % Vo.

Specific Surface Area : 0.0804 m²/g

Span : 0.806

Surface Weighted Mean D[3,2] : 74.671 µm

Uniformity : 0.255


Vol. Weighted Mean D[4,3] : 84.172

Result units : Volume

d(0.1) : 51.758 µm


d(0.5) : 82.906 µm

d(0.9) : 18.546 µm

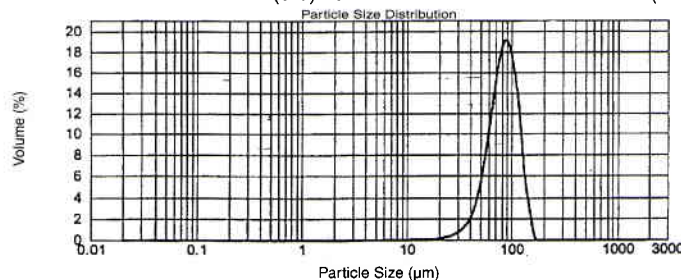

Graph B

HAAKE RHEOCORD 90 DATA SHEET

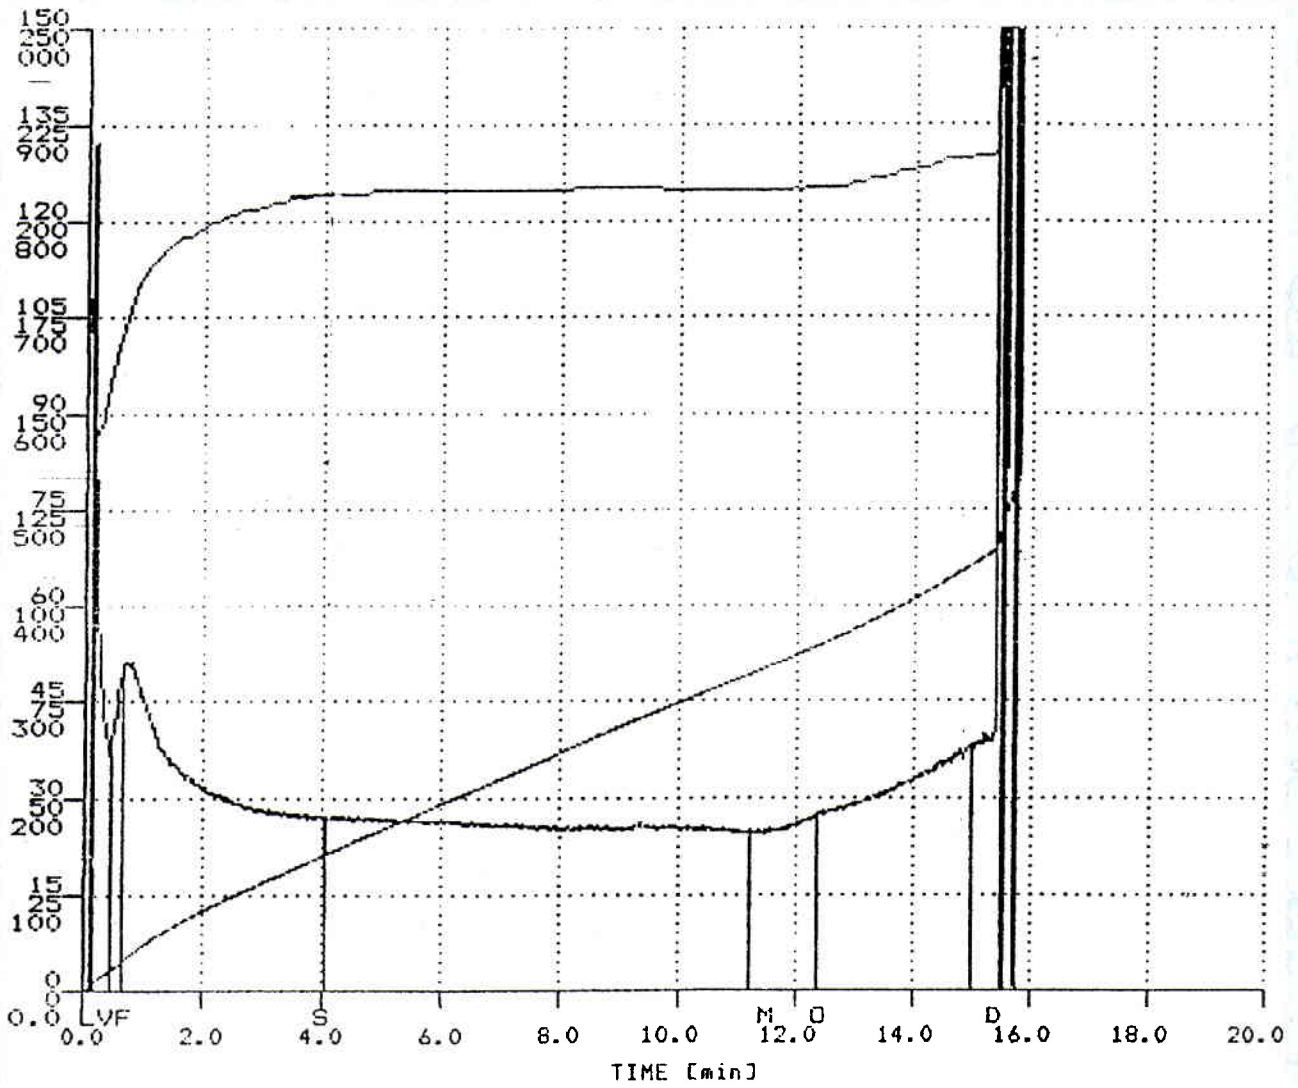

THERMOPLASTIC ANALYSIS RESULTS


3.2 Performance Data :

Property	Standard	Unit	Typical Value
Izod Impact Strength	ASTM D256	Kg cm / cm	36.5
Flexural Strength	ASTM D790	Kg / cm ²	889
Flexural Modulus	ASTM D790	Kg / cm ²	31323
Vicat Softening Point	ASTM D1525	Deg. C	110
Charpy Impact Strength	ASTM D256	J / m	67.8
Falling Dart Impact	ASTM D 4495		No cracks
Tensile Strength	ISO 527	Mpa	51.9
Tensile Elongation	ISO 527	%	13
Weather Resistance	ISO 4892, BS 2782 part 359	Retention of I.S.	More than 80%
Shrinkage		%	Max. 2.5

Recipe enclosed on next page

Recipe used :

PVC Resin (K 67)	100 phR
TBLS	4.5 phR
DBLS	1.0 phR
Calcium Stearate	0.5 phR
Calcium Carbonate	2.5 phR
INDOFIL K-120 ND	2.0 phR
GT-25 Internal lubricant	0.5 phR
G321 External lubricant	1.0 phR
INDOFIL KM-355	6.0 phR

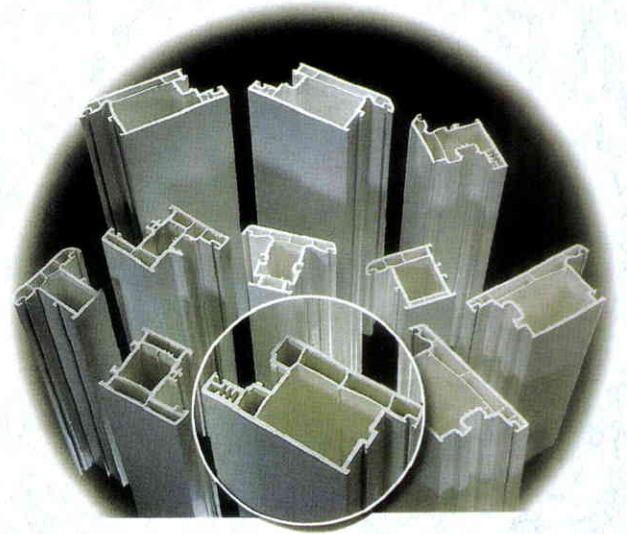


The results are obtained on compression moulded specimens.

3.3 Following data shows superiority of INDOFIL KM-355 over conventional impact modifier INDOFIL KM323B

IMPACT STRENGTH VARIATION		
PHR	IMPACT MODIFIER	
	INDOFIL KM-323B	INDOFIL KM-355
0	5.5	5.5
2	7.2	10.4
4	8.3	15.1
6	8.9	22.7
8	15.4	23.3
10	15.8	23.6

RECIPE	
INGREDIANT	phR
PVC RESIN (K67)	100.0
IMPACT MODIFIER	AS STATED
PROCESSING AID	2.0
CALCIUM CARBONATE	6.0
TiO2	4.0
ONE PACK	4.0
STEARIC ACID	2.0
CALCIUM STEARATE	1.0
DOP	0.5

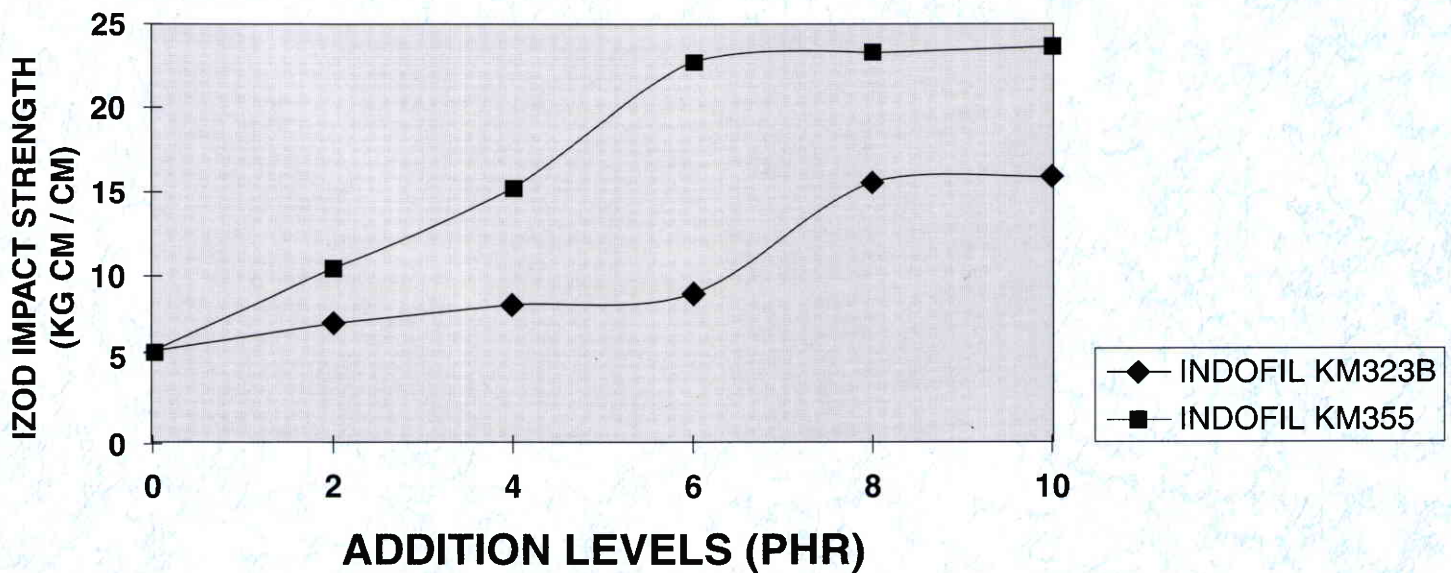


4 APPLICATIONS

Because of its above advantages it is especially suitable for the following-

- Window frames, sills & sidings
- Door panels
- Fencing, gutters & ducts
- Pipes & fittings
- Rollers & shutters
- Corrugated roofings & sheets
- Foam profiles

The specific advantages related to end use are :

- It can be used in wide range of machines in extrusion and injection.
- Due to its rubbery nature you get strength at critical corners free of cracks which is essential in complex profiles.
- The processing is required to be done at lower temperatures thus saving energy input.
- Lower dosages are required to get the same impact strength.
- Better replica of die design for extruded products due to lower shrinkage & better homogeneity.
- The finished articles last for longer life.

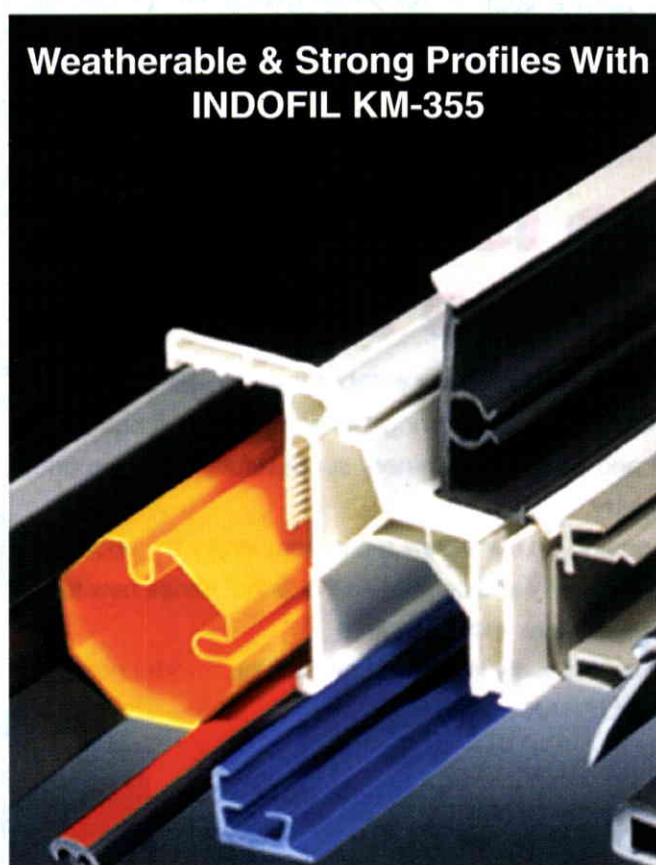

Indofil and Flask Symbol are registered trade marks of Indofil Chemicals Company, a division of Modipon Ltd., U.P., India. These suggestions and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use of our products are beyond our control. We recommend that the prospective user determine the suitability of our materials and suggestions before adopting them on a commercial scale.

INDOFIL CHEMICALS COMPANY

SPECIALITY & PERFORMANCE CHEMICALS

Nirlon House, Dr. Annie Besant Road, P. O. Box No. 9112, Mumbai - 400 030. India.

Tel. : 022-5663 7373, 2496 0000 Fax : 022-2493 8109, 2493 5667

E-mail : mktindl-icc@modi.com

NEW DELHI

6FF, Stuti Building, Bank Street,
Karol Bagh, New Delhi - 110 005

BRANCHES CALCUTTA

34, Circus Avenue,
Calcutta - 700 017.

CHENNAI

15, Thiruneermalai Road, Nagalkeni,
Chromepet, Chennai - 600 044.